

***Φ6.2mm 635nm Laser Module***

***P<sub>o</sub>: < 3mW***

Features

1. APC (auto power control) IC inside
2. Low current consumption of the APC circuit
3. Surge current protection
4. High quality lens for output beam




Absolute maximum ratings

Item	Symbol	Rating	Unit
Power supply voltage	V <sub>cc</sub>	3.3	V
Laser Module optical output power	P <sub>o</sub>	<3	mW
Operation temperature	T <sub>opr</sub>	0~40	°C
Storage temperature	T <sub>stg</sub>	0~60	°C

Electrical and optical characteristics (T<sub>c</sub>=25 °C)

Item	Symbol	Min.	Typ.	Max	Unit	Condition
Wavelength	λ	-	634	-	nm	P <sub>o</sub> = 3mW
Operation current	I <sub>op</sub>	-	-	50	mA	P <sub>o</sub> = 3mW V <sub>cc</sub> =3V
Operation voltage	V <sub>op</sub>	2.5	-	3.3	Volt	
Laser Beam spot size at 10m		<10mm				
Divergence angle		1.1 mrad				
Mean time to failure (MTTF) 25°C		>5000 hrs				

Outline dimensions (Units: mm)

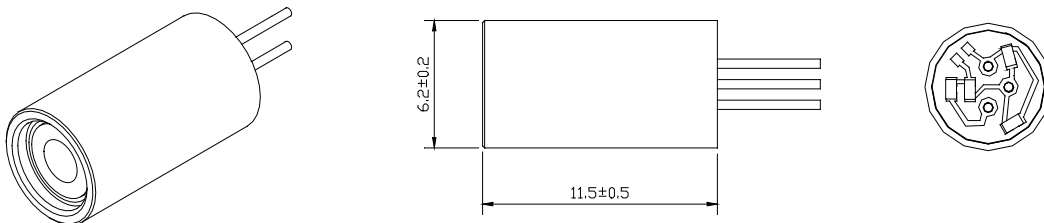

Aperture Size : 2.4mm

**Laser Safety Precautions**


1. Do not look into the laser beam directly by eyes. The laser beam may cause severe damage to human eyes.
2. Optical Lens is made of plastic or glass. Do not contaminate lens by soiling, oil or chemical.

*\* For reference only. Contents above are subject to change without notice.*

Contact

For US, Canada	Ayase America Inc.	e-mail: <a href="mailto:info@ayaseamerica.com">info@ayaseamerica.com</a>	+1-408-988-5277
For EU	Ayase Europe GmbH	e-mail: <a href="mailto:info@ayase-europe.de">info@ayase-europe.de</a>	+49-0-6122-533-811
For Japan	Ayase Co., Ltd.	e-mail: <a href="mailto:info@ayasecorporation.com">info@ayasecorporation.com</a>	+81-45-532-9501

PIN Assignment:




**A type** : Heat sink stand (-)

**Pin 1** : Vcc

**Pin 2** : GND

**Pin 3** : NC ( No external connection )






**B type** :Heat sink stand (+)



Instruction manual

1. DC Power connection mode 1





**A type** : Heat sink stand (-)

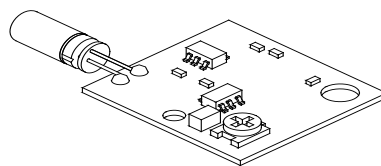

**B type** :Heat sink stand (+)



2. DC Power connection mode 2

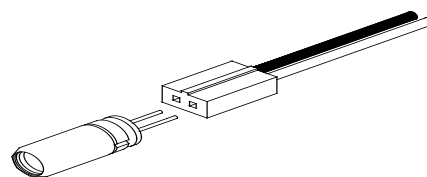

\* For reference only. Contents above are subject to change without notice.

Contact

For US, Canada  
For EU  
For Japan

Ayase America Inc.  
Ayase Europe GmbH  
Ayase Co., Ltd.

e-mail: [info@ayaseamerica.com](mailto:info@ayaseamerica.com)  
e-mail: [info@ayase-europe.de](mailto:info@ayase-europe.de)  
e-mail: [info@ayasecorporation.com](mailto:info@ayasecorporation.com)

+1-408-988-5277  
+49-0-6122-533-811  
+81-45-532-9501